


SP05 PRE-COMPRESSION

Shroud	PP
Nozzle	PE
PRC Valve	POP
Body	PP
U-Valve	EBA
Piston	PE
Gasket	PE/EPE
Closure	PP
Trigger	PP
Dip Tube	PP
Spring	POM
Cap Size	28/400
	28/410 (standard)
	Lock Cap

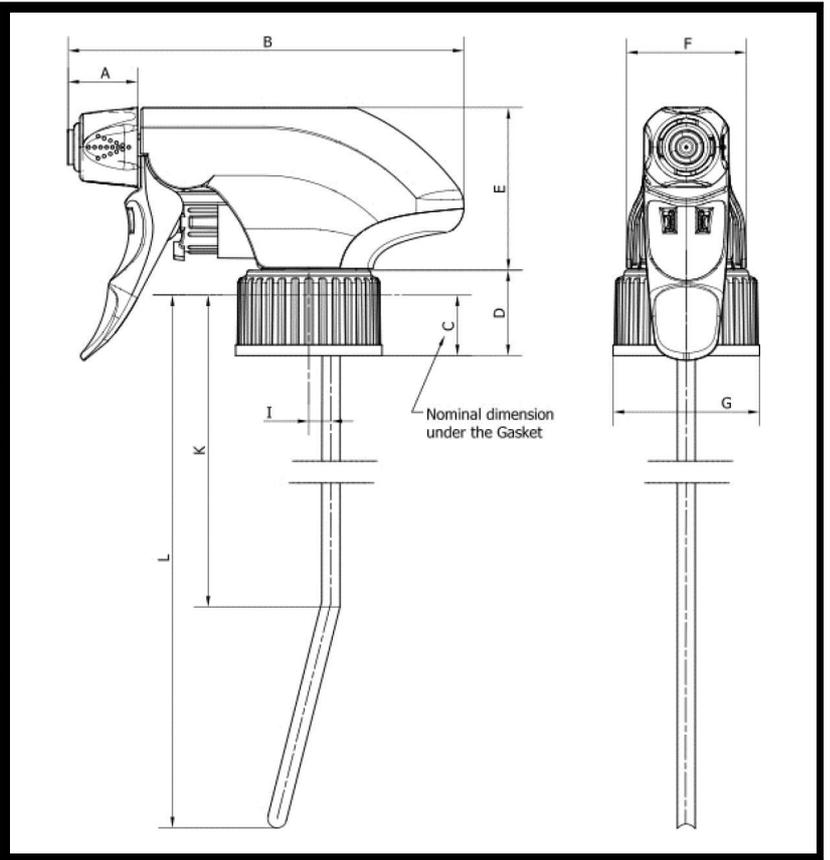

DIMENSIONS


A	15,70mm	B	89,30mm
C	13,80mm	D	19,40mm
E	36,90mm	F	26,50mm
G	33,00mm	I	5,00mm
K	95,80mm	L	120-285mm

STYLE & FUNCTION

Output	1.25cc per stroke with water
Priming	Maximum of 5 strokes with water
Durability	Up to 5,000 strokes with water
Dip Tube	Bent tube angle
End of Dip Tube	U-cut
Closing Torque	Recommended 2-2.2Nm
Pre Compression	Yes

PACKING CONFIGURATION

A	80cm
B	120cm
C	15cm
D	215cm
E	230cm

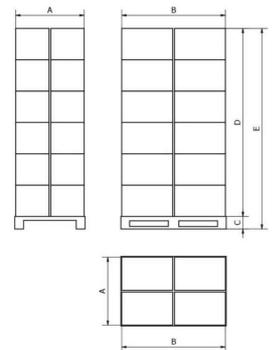

Boxes per pallet	24
Boxes per layer	4
Box size	60 x 40 x 36cm
Piece per box	370
Pieces per pallet	8,880
Box weight	9kg
Pallet total weight	247kg
Pallet type	Pallet is wrapped with stretch PE film

This data sheet is for reference only. Full specification can be provided on request. Values indicated may vary within permitted tolerances. Suitability for purpose is subject to user verification.

Nexus Packaging Ltd.

Nexus House, Wilson Business Park, Queen Elizabeth Avenue, Hillington Park, Glasgow G52 4NQ.
 +44 (0)141 429 2525 | admin@nexpack.co.uk | www.nexpack.co.uk

